


SURFACE PREPARATION PRODUCTS

ISO 14001 CERTIFIED ENVIRONMENTAL SYSTEM REGISTERED

ISO 9001 CERTIFIED QUALITY SYSTEM REGISTERED

ISO/IEC-17025 LABORATORY TESTING CERTIFIED

VpCI-408 Mild Alkaline Cleaner

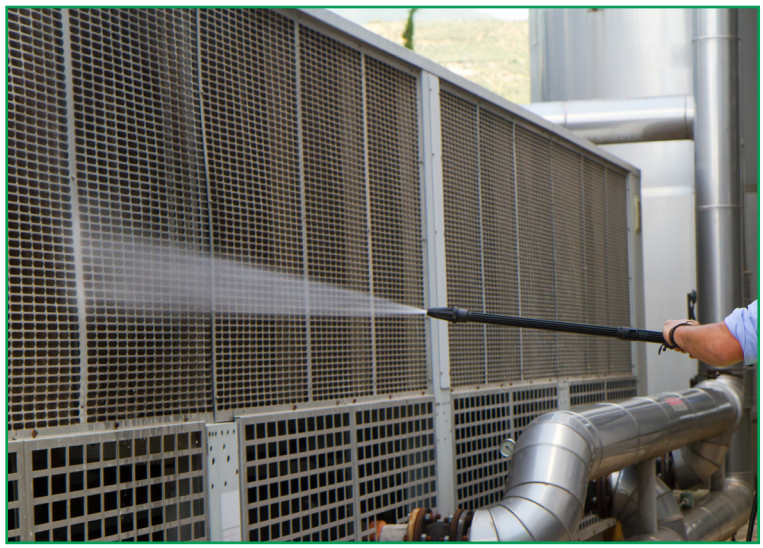

▪ 제품 설명

VpCI-408은 고압 분사 세척기 및 고압 세척 기계에서 사용할 수 있는 순한 알칼리성 계면활성제 혼합물입니다. 이 제품은 가공유, 냉각제, 가벼운 오일 및 그리스를 제거하는 데 사용될 수 있습니다. VpCI-408은 pH가 거의 중성에 가까워 일부 폐수 처리가 필요하지 않게 합니다.

VpCI-408은 세척 후 다중 금속 부식 방지 기능을 제공하는 비거품성 알칼리 세정제입니다. 또한, 고농축 버전인 VpCI-408 SC로도 제공됩니다.

▪ 제품 특징

- 고압 분사 시스템에서 사용 가능한 순 알칼리 세정제
- 나이트라이트 무첨가
- 다중 금속 보호를 위한 녹 방지제 함유
- 효과를 발휘하려면 기계적 작용이 필요
- 잔여 필름이 남지 않음
- 페인트 접착에 영향을 미치지 않음
- 비거품성

▪ 효과적인 용도

- 도장 또는 산세 전에 유성 막으로 덮인 판재, 철판, 금속 주물
- 일반적인 가공 또는 드로잉 유체로 오염된 금속 부품
- 고압 세척

▪ 제품 특성

외관	약간 흐릿한 노란색 액체
냄새	희미한
온도 범위	49-66°C
VpCI-408	
pH	8.5-9.5 (1% 수용액)
비중	1.04-1.07kg/l
비휘발성 물질 함량	9-13%
VpCI-408 SC	
pH	8.5-9.5 (1% aq. solution)
비중	1.10-1.15kg/l
비휘발성 물질 함량	28-31%

▪ VpCI-408 희석 비율 차트

	Volume VpCI®-408 (US) per gallon water	Volume VpCI®-408 (Metric) per liter water	Dosage (%)
Light Cleaning	6.4 ounces (~3/4 cup)	50ml	5
Medium Cleaning	12.8 ounces (~1.5 cups)	100ml	10
Heavy Cleaning	25.6 ounces (~3 cups)	200ml	20

CORTEC CORPORATION

QUALITY EXCELLENCE


Environmentally Safe VpCI®/MCI® Technologies

▪ 포장


VpCI-408은 19리터 플라스틱 통, 208리터 드럼으로 제공됩니다.

▪ 보관

최소 : 0°C
최대 : 49°C

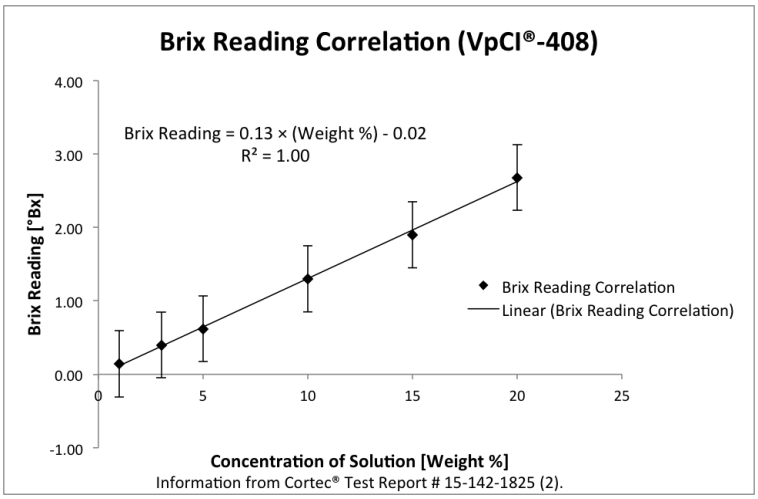

Information from Cortec® Test Report # 15-142-1825 (2).

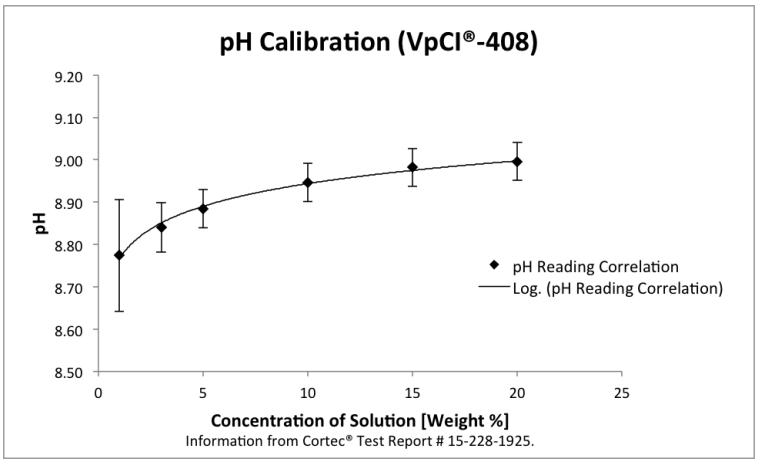

Information from Cortec® Test Report # 15-228-1925.

산업용으로만 사용하십시오
어린이의 손이 닿지 않는 곳에 보관하십시오
용기를 반드시 밀폐하여 보관하십시오
자세한 정보는 안전 데이터 시트를 참조하십시오

Please note the solutions used above were created using deionized water. Slight differences in water chemistry (dissolved solids, hardness, etc.) may lead to differences in readings. Please use these numbers as reference only; Contact Cortec® Laboratories with any questions.

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.
BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Distributed by:

CORTEC CORPORATION
Environmentally Safe VpCI®/MCI® Technologies
4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
Internet http://www.cortecvci.com

Printed on recycled paper 100% post consumer

Revised: 04/20/16 . Supercedes: 03/16/16. ©Cortec Corporation 2002-2016 of Cortec Corporation.
All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2016, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.